

## TWWE20 Washer extractor



## Technical features

Drum volume	<b>204</b> lt
Capacity	<b>20</b> kg
	<b>30</b> kg/h
Heating System	Steam and/or electrical
Processing time	<b>40-45</b> min
Motor power	<b>3</b> kW
Heating element power	<b>18</b> kW
Steam consumption	<b>10</b> kg/h
Extraction force	<b>360</b> G
Width	<b>976</b> mm
Depth	<b>1174</b> mm
Height	<b>1490</b> mm
Weight	<b>465</b> kg

## Features

- » Compact design
- » Status light
- » Top filled chemical unit
- » Automatic door lock
- » Galvanized chassis
- » Conical drum opening
- » Clamped drum
- » Ceramic coated shaft
- » Lubrication free bearing house
- » Passively cooled motor
- » Easy removable shaft and pulley assembly

## Control system

- » Question Answer programming
- » Annotated parameter settings
- » Alarm statistics
- » Trouble shooting guide with illustrations
- » Database backup
- » CSV format program transfer
- » Updating software from the USB port
- » Multi-user access control
- » Multi-language support
- » External dosing control system

## TWE40 Washer extractor



### Technical features

Drum volume	<b>400 lt</b>
Capacity	<b>40 kg</b>
	<b>60 kg/h</b>
Heating System	<b>Steam and/or electrical</b>
Processing time	<b>40-45 min</b>
Motor power	<b>5.5 kW</b>
Heating element power	<b>24 kW</b>
Steam consumption	<b>20 kg/h</b>
Extraction force	<b>360 G</b>
Width	<b>1179 mm</b>
Depth	<b>1427 mm</b>
Height	<b>1550 mm</b>
Weight	<b>870 kg</b>

### Features

- » Compact design
- » Status light
- » Top filled chemical unit
- » Automatic door lock
- » Galvanized chassis
- » Conical drum opening
- » Clamped drum
- » Ceramic coated shaft
- » Lubrication free bearing house
- » Easy removable shaft and pulley assembly

### Control system

- » Question Answer programming
- » Annotated parameter settings
- » Alarm statistics
- » Trouble shooting guide with illustrations
- » Database backup
- » CSV format program transfer
- » Updating software from the USB port
- » Multi-user access control
- » Multi-language support
- » External dosing control system

## TWE60 Washer extractor



## Technical features

Drum volume	<b>570 lt</b>
Capacity	<b>60 kg</b>
	<b>90 kg/h</b>
Heating System	<b>Steam and/or electrical</b>
Processing time	<b>40-45 min</b>
Motor power	<b>11 kW</b>
Heating element power	<b>27.5 kW</b>
Steam consumption	<b>30 kg/h</b>
Extraction force	<b>360 G</b>
Width	<b>1636 mm</b>
Depth	<b>1432 mm</b>
Height	<b>1911 mm</b>
Weight	<b>1935 kg</b>

## Features

- » Status light
- » Automatic door lock
- » Conical drum opening
- » Cataphoresis coated undercarriage
- » Lubrication free bearing house
- » Ceramic coated shaft sealing surface
- » Dosing input
- » USB input
- » Easy removable shaft and pulley assembly

## Control system

- » Question Answer programming
- » Annotated parameter settings
- » Alarm statistics
- » Trouble shooting guide with illustrations
- » Database backup
- » CSV format program transfer
- » Updating software from the USB port
- » Multi-user access control
- » Multi-language support
- » External dosing control system

## TWE110 Washer extractor



### Technical features

Drum volume	<b>1101</b> lt
Capacity	<b>110</b> kg
	<b>165</b> kg/h
Heating System	Steam
Processing time	<b>40-45</b> min
Motor power	<b>22</b> kW
Steam consumption	<b>55</b> kg/h
Extraction force	<b>360</b> G
Width	<b>1990</b> mm
Depth	<b>1995</b> mm
Height	<b>2275</b> mm
Weight	<b>4170</b> kg

### Features

- » Tilting forward 12° (optional)
- » Status light
- » Automatic door lock
- » Conical drum opening
- » Cataphoresis coated undercarriage
- » Lubrication free bearing house
- » Easy removable shaft and pulley assembly
- » Ceramic coated shaft sealing surface
- » Dosing input
- » USB input

### Control system

- » Question Answer programming
- » Annotated parameter settings
- » Alarm statistics
- » Trouble shooting guide with illustrations
- » Database backup
- » CSV format program transfer
- » Updating software from the USB port
- » Multi-user access control
- » Multi-language support
- » External dosing control system

## TD20 Tumble dryer



## Technical features

Drum volume	<b>400 lt</b>
Capacity	<b>20 kg</b>
	<b>30 kg/h</b>
Heating System	<b>Electric, Steam or Gas</b>
Processing time	<b>40 min</b>
Motor power	<b>0.75 kW</b>
Fan motor power	<b>1.1 kW</b>
Heating Element power	<b>20 kW</b>
Steam consumption	<b>40 kg/h</b>
Gas consumption	<b>5 m<sup>3</sup>/h</b>
Width	<b>1166 mm</b>
Depth	<b>1184 mm</b>
Height	<b>E-1835 mm</b>
	<b>S-1950 mm</b>
	<b>G-1970 mm</b>
Weight	<b>E-406 kg</b>
	<b>S-411 kg</b>
	<b>G-400 kg</b>

## Features

- » Compact design
- » Status light
- » Sliding doors
- » Conical drum opening
- » Galvanized chassis
- » Fast access door
- » Vacuum flap
- » Cooldown (optional)
- » Constant and two way spin
- » Large filter surface with transparent glass

## TD40 Tumble dryer



## Technical features

Drum volume	<b>800 lt</b>
Capacity	<b>40 kg</b>
	<b>60 kg/h</b>
Heating System	<b>Electric, Steam or Gas</b>
Processing time	<b>40 min</b>
Motor power	<b>1.5 kW</b>
Fan motor power	<b>3.7 kW</b>
Heating Element power	<b>36 kW</b>
Steam consumption	<b>80 kg/h</b>
Gas consumption	<b>7 m<sup>3</sup>/h</b>
Width	<b>1420 mm</b>
Depth	<b>1375 mm</b>
Height	<b>E-2160 mm</b>
	<b>S-2240 mm</b>
	<b>G-2260 mm</b>
Weight	<b>E-570 kg</b>
	<b>S-575 kg</b>
	<b>G-565 kg</b>

## Features

- » Compact design
- » Status light
- » Sliding doors
- » Conical drum opening
- » Galvanized chassis
- » Fast access door
- » Vacuum flap
- » Cooldown (optional)
- » Constant and two way spin
- » Large filter surface with transparent glass

## TD60 Tumble dryer



## Technical features

Drum volume	<b>1200 lt</b>
Capacity	<b>60 kg</b> <b>90 kg/h</b>
Heating System	<b>Electric, Steam or Gas</b>
Processing time	<b>40 min</b>
Motor power	<b>1.5 kW</b>
Fan motor power	<b>3.7 kW</b>
Heating element power	<b>45 kW</b>
Steam consumption	<b>120 kg/h</b>
Gas consumption	<b>9 m<sup>3</sup>/h</b>
Width	<b>1420 mm</b>
Depth	<b>1650 mm</b>
Height	<b>E-2138 mm</b> <b>S-2240 mm</b> <b>G-2250 mm</b>
Weight	<b>E-650 kg</b> <b>S-655 kg</b> <b>G-645 kg</b>

## Features

- » Compact design
- » Status light
- » Sliding doors
- » Conical drum opening
- » Galvanized chassis
- » Fast access door
- » Vacuum flap
- » Cooldown (optional)
- » Constant and two way spin
- » Large filter surface with transparent glass



## TD110 Tumble dryer



## Technical features

Drum volume	<b>2400 lt</b>
Capacity	<b>110 kg</b>
	<b>165 kg/h</b>
Heating System	<b>Steam or Gas</b>
Processing time	<b>40 min</b>
Motor power	<b>7.5 kW</b>
Fan motor power	<b>5.5 kW</b>
Steam consumption	<b>170 kg/h</b>
Gas consumption	<b>20 m<sup>3</sup>/h</b>
Width	<b>1610 mm</b>
Depth	<b>2700 mm</b>
Height	<b>S-2620 mm</b>
	<b>G-2472 mm</b>
Weight	<b>S-1700 kg</b>
	<b>G-1680 kg</b>

## Features

- » Tilting forward 12°
- » Compact design
- » Status light
- » Sliding doors
- » Conical drum opening
- » Galvanized chassis
- » Fast access door
- » Vacuum flap
- » Cooldown
- » Constant and two way spin
- » Large filter surface with transparent glass
- » Speed Control




## TTF200 Towel folding machine



### Features

- » Manual, automatic and continuous operation modes
- » Plain packaging
- » Can be positioned in 4 different directions sliding stacking system
- » Soiled towels basket
- » 7" touch screen controller
- » Data exchange via Ethernet and USP port
- » Standard reverse motor and assisting strips for quality folds

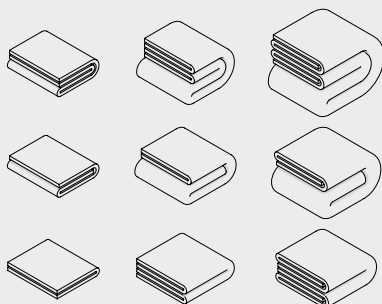

### Technical features


Nominal capacity	<b>1250 pcs/h</b>
Operational capacity	<b>~900 pcs/h</b>
Motor Power	<b>1.5 kW</b>
Air pressure	<b>6-8 bar</b>
Air consumption	<b>350 lt/min</b>
Maximum working size	<b>1200×2000 mm</b>
Minimum working size	<b>450×600 mm</b>
The number of lines	<b>3 or 4</b>
Folding number	<b>2×2</b>
Width	<b>2070 mm</b>
Depth	<b>4670 mm</b>
Height	<b>1500 mm</b>
Weight	<b>1100 kg machine</b> <b>+125 kg output conveyer</b>

## TSF3000 Sheet folding machine



### Features


- » Plain packaging
- » Can be positioned in 4 different directions sliding stacking system
- » Touch screen controller
- » Data exchange via Ethernet and USP port
- » Speed Control
- » 2 cross and 3 lateral folds
- » Status light

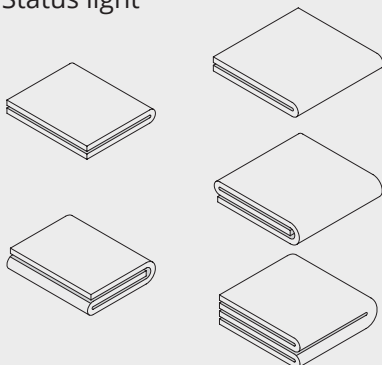

### Technical features

Nominal capacity	<b>1000 pcs/h</b>
Operational capacity	<b>~750 pcs/h</b>
Motor Power	<b>1.5 kW</b>
Air pressure	<b>6-8 bar</b>
Air consumption	<b>420 lt/min</b>
Working speed	<b>30/45 m/min</b>
Maximum working size	<b>3000×3000 mm</b>
Minimum working size	<b>300×600 mm</b>
The number of lines	<b>1 or 2</b>
Folding number	<b>2×3</b>
Width	<b>4536 mm</b>
Depth	<b>3960 mm</b>
Height	<b>2000 mm</b>
Weight	<b>1900 kg</b>

## TFI3218 Flatwork ironer

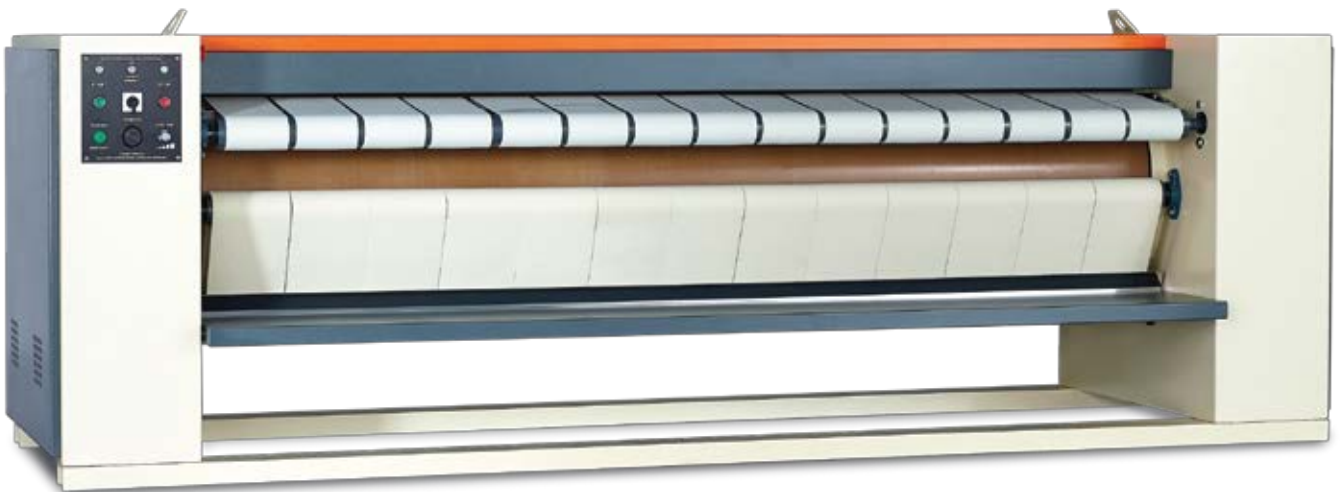


### Features

- » Heat-resistant Nomex™ Tape
- » Teflon coated cylinder
- » Adjustable speed selection
- » Safety curtain
- » Speed Control

### Technical features

Roller length	<b>1800 mm</b>
Roller diameter	<b>320 mm</b>
Heating system	<b>Electrical</b>
Motor Power	<b>0.37 kW</b>
Heating element	<b>12 kW</b>
Ironing capacity	<b>22 kg/h</b>
Width	<b>2350 mm</b>
Depth	<b>900 mm</b>
Height	<b>1280 mm</b>
Weight	<b>510 kg</b>

## TFI6015 Flatwork ironer

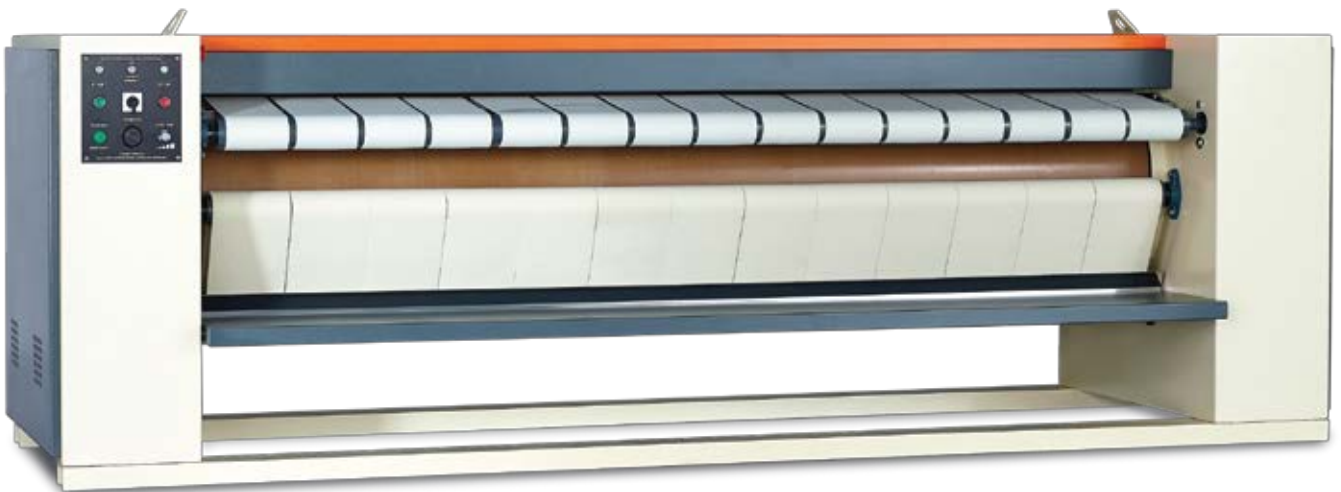


### Features

- » Heat-resistant Nomex™ Tape
- » Teflon coated cylinder
- » Adjustable speed selection
- » Safety curtain
- » Speed Control

### Technical features

Roller length	<b>1500 mm</b>
Roller diameter	<b>600 mm</b>
Heating system	<b>Electrical or Steam</b>
Steam consumption	<b>50 kg/h</b>
Motor Power	<b>0.37 kW</b>
Heating Element	<b>24 kW</b>
Ironing capacity	<b>40 kg/h</b>
Width	<b>2200 mm</b>
Depth	<b>1070 mm</b>
Height	<b>1300 mm</b>
Weight	<b>510 kg</b>

## TFI6020 Flatwork ironer

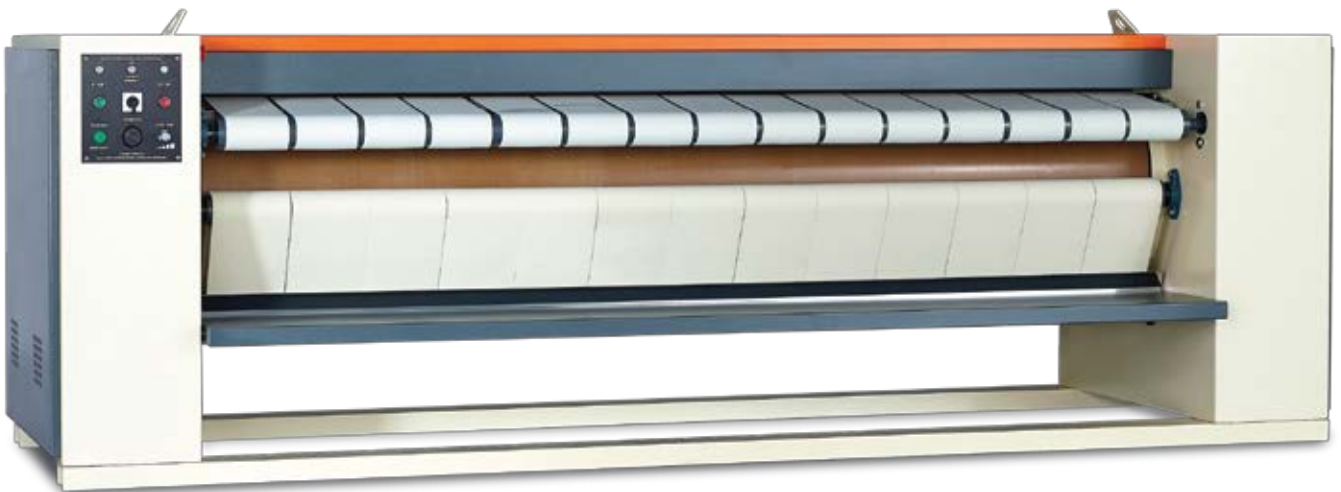


### Features

- » Heat-resistant Nomex™ Tape
- » Teflon coated cylinder
- » Adjustable speed selection
- » Safety curtain
- » Speed Control

### Technical features

Roller length	<b>2000 mm</b>
Roller diameter	<b>600 mm</b>
Heating system	<b>Electrical or Steam</b>
Steam consumption	<b>70 kg/h</b>
Motor Power	<b>0.37 kW</b>
Heating Element	<b>24 kW</b>
Ironing capacity	<b>40 kg/h</b>
Width	<b>2700 mm</b>
Depth	<b>1070 mm</b>
Height	<b>1300 mm</b>
Weight	<b>840 kg</b>

## TFI6025 Flatwork ironer

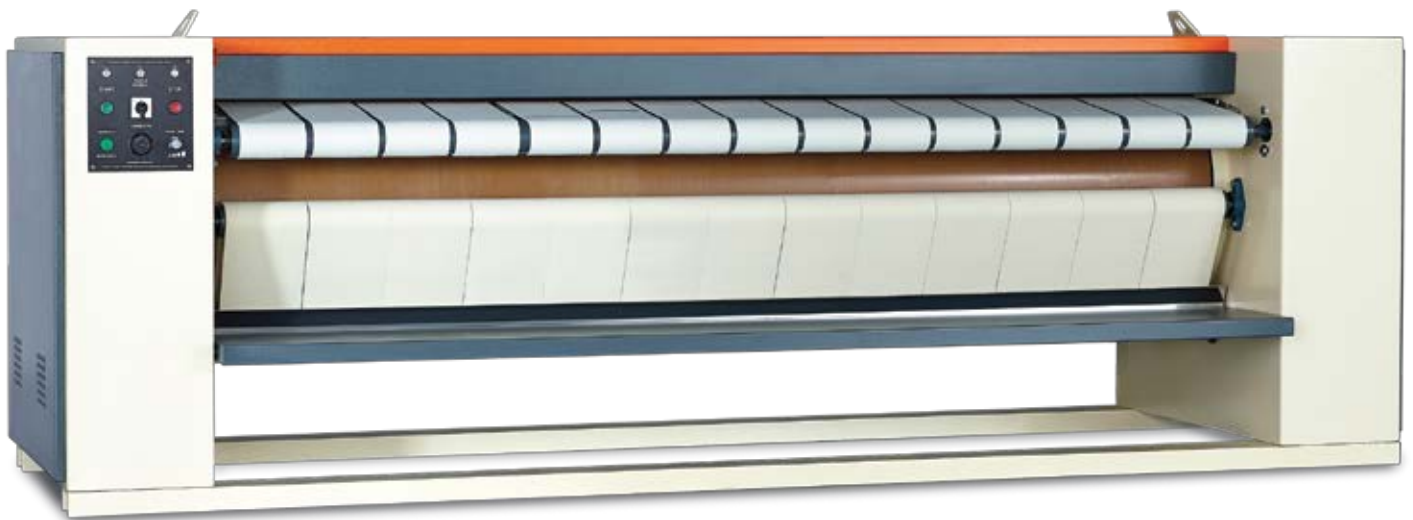

### Features

- » Heat-resistant Nomex™ Tape
- » Teflon coated cylinder
- » Adjustable speed selection
- » Safety curtain
- » Speed Control

### Technical features

Roller length	<b>2500 mm</b>
Roller diameter	<b>600 mm</b>
Heating system	<b>Electrical or Steam</b>
Steam consumption	<b>100 kg/h</b>
Motor Power	<b>0.37 kW</b>
Heating Element	<b>24 kW</b>
Ironing capacity	<b>70 kg/h</b>
Width	<b>3200 mm</b>
Depth	<b>1070 mm</b>
Height	<b>1300 mm</b>
Weight	<b>1200 kg</b>

## TFI8030 Flatwork ironer



### Features

- » Heat-resistant Nomex™ Tape
- » Teflon coated cylinder
- » Adjustable speed selection
- » Safety curtain
- » Speed Control

### Technical features

Roller length	<b>3000 mm</b>
Roller diameter	<b>800 mm</b>
Heat transfer surfaces	<b>680 dm<sup>2</sup></b>
Heating System	<b>Electric or steam</b>
Motor Power	<b>1.5 kW</b>
Heating Element	<b>36 kW</b>
Ironing capacity	<b>70 kg/h</b>
Steam consumption	<b>180 kg/h</b>
Width	<b>4200 mm</b>
Depth	<b>1700 mm</b>
Height	<b>1450 mm</b>
Weight	<b>2360 kg</b>



## TFI8030x2 Flatwork ironer



### Features

- » Double-cylinder
- » Heat-resistant Nomex™ Tapes
- » Teflon coated cylinder
- » Adjustable speed selection
- » Safety curtain
- » Speed control
- » Separate condenser assembly for each cylinder
- » 330° roller contact surface

### Technical features

Roller length	<b>3000 mm</b>
Roller diameter	<b>800 mm</b>
Heat transfer surfaces	<b>1360 dm<sup>2</sup></b>
Heating System	<b>Steam</b>
Motor Power	<b>2.2 kW</b>
Ironing capacity	<b>130 kg/h</b>
Steam consumption	<b>250 kg/h</b>
Width	<b>4200 mm</b>
Depth	<b>2710 mm</b>
Height	<b>1850 mm</b>
Weight	<b>3200 kg</b>