

DRYING

SINGLE POCKET DRYERS ECONOMIC LINE SC-11/14 M



CHARACTERISTICS

M PROGRAMMER

- New M programmer: push buttons to control temperature and time

OUTSTANDING FEATURES

- Reversing drum action as standard
- Frequency inverter as standard
- Galvanized drum as standard

EFFICIENCY

- Big fluff filter

VERSATILITY

- Make to order - customisation
- OPL > Multivending - Standard OPL model easily transformable to coin laundry uses

ERGONOMICS

- Drawer as fluff filter, made of stainless steel
- Biggest door diameters
- Opening sense of door adjustable on site

MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with M console

OTHERS

- White painted panels
- COOL DOWN - anti-wrinkle at the end of the cycle
- Heating options: electric, gas and steam
- CE approved

OPTIONS


- Opposite door opening
- M programmer display
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

TECHNICAL DATA

SINGLE POCKET DRYERS | ECONOMIC LINE | SC-11/14 M

	UNIT.	SC-11 M	SC-14 M		
CAPACITY					
Capacity 1/18	Kg	12	15		
Capacity 1/20	Kg	11	13,5		
Hourly Output ECONOMIC LINE*	Kg/h	23-21	34-30		
Evaporation capacity ECONOMIC LINE*	l/h	14,5	15,40		
DRUM					
Ø Drum	mm	750	750		
Ø Door	mm	574	574		
Door center height	mm	976	976		
Load hole bottom height	mm	689	689		
Drum length	mm	475	610		
Drum volume	l	210	270		
POWER					
Drum motor power	Kw	0,37	0,37		
Fan motor power ECONOMIC LINE	Kw	0,25	0,25		
Electric heating power ALL RANGES	Kw	12	18		
Total electric power (elec.model) ECONOMIC LINE	Kw	12,67	18,67		
Gas heating power ALL RANGES	Kw	20,51	20,51		
Total electric power (gas model) ECONOMIC LINE	Kw	0,67	0,67		
CONNECTIONS		ELECTRICAL	GAS	ELECTRICAL	GAS
Tension 230V - I + N + T	N° x mm ² / A	3 x 25 / 63A	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	N° x mm ² / A	4 x 10 / 40A	3 x 1,5 / 20A	4x16 / 63A	3 x 1,5 / 20A
Tension 400V - III + N + T	N° x mm ² / A	5 x 4 / 25A	3 x 1,5 / 20A	5x10 / 32A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"			
DIMENSIONS / PACKING DIMENSIONS					
Net width / Gross width	mm	785 / 865		785 / 865	
Net Depth / Gross Depth	mm	855 / 940		989 / 1074	
Net Height / Gross Height	mm	1.694 / 1.840		1694 / 1840	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	172 / 180		180 / 190	
OTHERS					
Max airflow ECONOMIC LINE	m ³ /h	850		850	
Ø Fume exhaust	mm	200		200	
Sound level ECONOMIC LINE	dB	64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

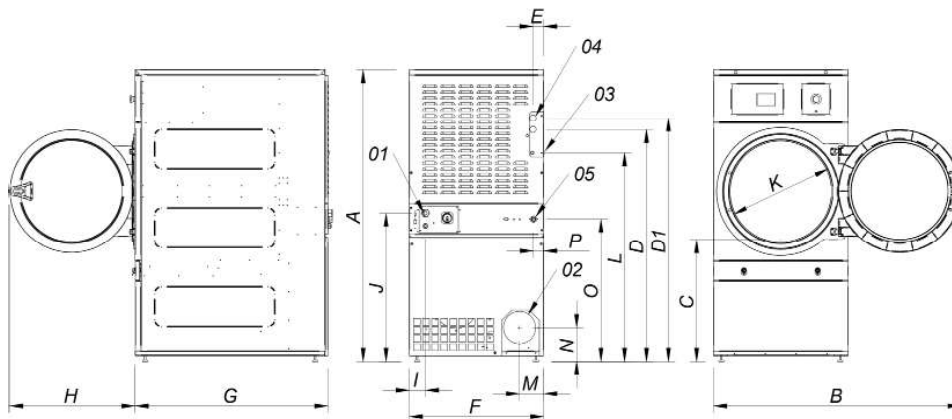

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 05 CONDENSATE OUTLET 3/4"
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
SC-11	1694	1447	689	1354	1422	68	68	785	855	735	95	870	575	1226	133	180	830	65
SC-14	1694	1447	689	1354	1422	68	68	785	989	735	95	870	575	1226	133	180	830	65



DRYING

SINGLE POCKET DRYERS ECONOMIC LINE SC-16/23 M

CHARACTERISTICS

M PROGRAMMER

- New M programmer: push buttons to control temperature and time

OUTSTANDING FEATURES

- Reversing drum action as standard
- Frequency inverter as standard
- Galvanized drum as standard

EFFICIENCY

- Big fluff filter

VERSATILITY

- Make to order - customisation
- OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses

ERGONOMICS

- Drawer as fluff filter, made of stainless steel
- Biggest door diameters
- Opening sense of door adjustable on site

MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with M console

OTHERS

- White painted panels
- COOL DOWN - anti-wrinkle at the end of the cycle
- Heating options: electric, gas and steam
- CE approved

OPTIONS

- Opposite door opening
- M programmer display
- Ship voltage for electric models: 440V III 50/60 Hz No neutral




TECHNICAL DATA

SINGLE POCKET DRYERS | ECONOMIC LINE | SC-16/23 M


	UNIT.	SC-16 M	SC-23 M		
CAPACITY					
Capacity 1/18	Kg	18	26		
Capacity 1/20	Kg	17	23		
Hourly Output ECONOMIC LINE*	Kg/h	35-33	41-35		
Evaporation capacity ECONOMIC LINE*	l/h	16,3	20,4		
DRUM					
Ø Drum	mm	750	855		
Ø Door	mm	574	574		
Door center height	mm	976	1.030		
Load hole bottom height	mm	689	743		
Drum length	mm	746	800		
Drum volume	l	330	460		
POWER					
Drum motor power	Kw	0,37	0,37		
Fan motor power ECONOMIC LINE	Kw	0,25	0,55		
Electric heating power ALL RANGES	Kw	18	24		
Total electric power (elec.model) ECONOMIC LINE	Kw	18,67	24,97		
Gas heating power ALL RANGES	Kw	20,51	31		
Total electric power (gas model) ECONOMIC LINE	Kw	0,67	0,97		
CONNECTIONS		ELECTRICAL	GAS	ELECTRICAL	GAS
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 16 / 63A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 10 / 32A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	1/2"
DIMENSIONS / PACKING DIMENSIONS					
Net width / Gross width	mm	785 / 865		890 / 970	
Net Depth / Gross Depth	mm	1.125 / 1.210		1.255 / 1.345	
Net Height / Gross Height	mm	1.694 / 1.840		1.812 / 1.940	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	187 / 200		210 / 230	
OTHERS					
Max airflow ECONOMIC LINE	m3/h	850		1.200	
Ø Fume exhaust	mm	200		200	
Sound level ECONOMIC LINE	dB	64		65	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

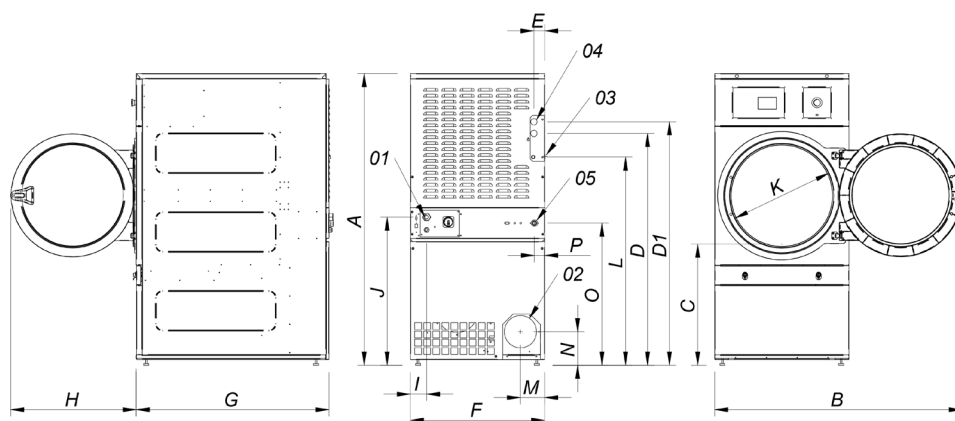

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 04 STEAM INLET 1" (SC-23)
- 05 CONDENSATE OUTLET 3/4"
- 05 CONDENSATE OUTLET 1" (S C-23)
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
SC-16	1694	1447	689	1354	1422	68	68	785	1125	735	95	870	575	1226	133	180	830	65
SC-23	1812	1552	743	1430	1532	112	55	890	1255	735	95	920	575	1344	238	180	885	65



DRYING

SINGLE POCKET DRYERS ECONOMIC LINE SC-28/35 M



CHARACTERISTICS

M PROGRAMMER

- New M programmer: push buttons to control temperature and time

OUTSTANDING FEATURES

- Reversing drum action as standard
- Frequency inverter as standard
- Galvanized drum as standard

EFFICIENCY

- Big fluff filter

VERSATILITY

- Make to order - customisation
- OPL > Multivending - Standard OPL model easily transformable to coin laundry uses

ERGONOMICS

- Drawer as fluff filter, made of stainless steel
- Biggest door diameters
- Opening sense of door adjustable on site

MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with M console

OTHERS

- White painted panels
- COOL DOWN - anti-wrinkle at the end of the cycle
- Heating options: electric, gas and steam
- CE approved

OPTIONS


- M programmer display
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

TECHNICAL DATA

SINGLE POCKET DRYERS | ECONOMIC LINE | SC-28/35 M

	UNIT.	SC-28 M	SC-35 M		
CAPACITY					
Capacity 1/18	Kg	31	37		
Capacity 1/20	Kg	28	33		
Hourly Output ECONOMIC LINE*	Kg/h	56-53	70-65		
Evaporation capacity ECONOMIC LINE*	l/h	30,9	32,10		
DRUM					
Ø Drum	mm	947	947		
Ø Door	mm	802	802		
Door center height	mm	1040	1040		
Load hole bottom height	mm	640	640		
Drum length	mm	780	936		
Drum volume	l	550	660		
POWER					
Drum motor power	Kw	0,55	0,55		
Fan motor power ECONOMIC LINE	Kw	0,55	0,55		
Electric heating power ALL RANGES	Kw	30	36		
Total electric power (elec.model) ECONOMIC	Kw	31,15	37,15		
Gas heating power ALL RANGES	Kw	41	41		
Total electric power (gas model) ECONOMIC	Kw	1,15	1,15		
CONNECTIONS		ELECTRICAL	GAS	ELECTRICAL	GAS
Tension 230V - I + N + T	N° x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	N° x mm2 / A	4 x 35 / 100A	3 x 1,5 / 20A	4 x 50 / 125A	3 x 1,5 / 20A
Tension 400V - III + N + T	N° x mm2 / A	5 x 16 / 63A	3 x 1,5 / 20A	5 x 16 / 63A	3 x 1,5 / 20A
Ø Gas inlet	BSP				
DIMENSIONS / PACKING DIMENSIONS					
Net width / Gross width	mm	985 / 1065		985 / 1065	
Net Depth / Gross Depth	mm	1054 / 1154		1210 / 1310	
Net Height / Gross Height	mm	1975 / 2080		1975 / 2080	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	230 / 260		260 / 285	
OTHERS					
Max airflow ECONOMIC LINE	m3/h	1200		1200	
Ø Fume exhaust	mm	200		200	
Sound level ECONOMIC LINE	dB	65		65	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

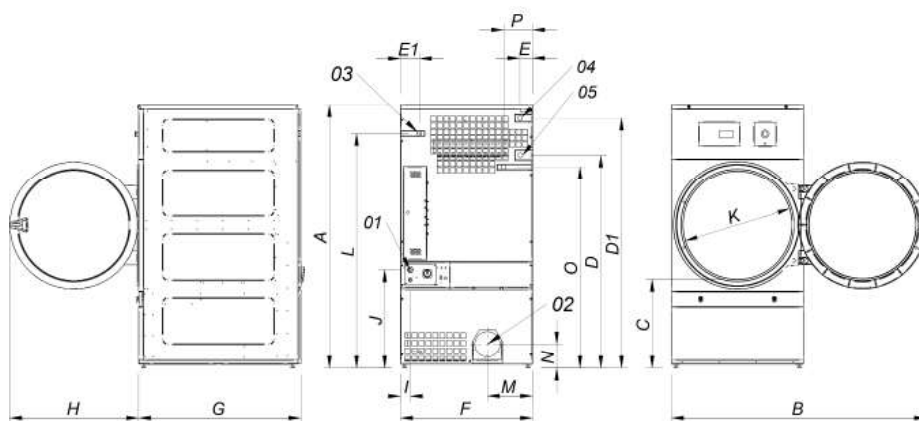

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 1"
- 05 CONDENSATE OULET 1"
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
SC-28	1975	1910	660	1590	1875	102	130	985	1054	970	70	730	802	1760	337	178	1510	215
SC-35	1975	1910	660	1590	1875	102	130	985	1210	970	70	730	802	1760	337	178	1510	215