



# DRYING

## SINGLE POCKET DRYERS CONCEPT SR-18/22 M

### CHARACTERISTICS

#### M PROGRAMMER

- New M programmer: push buttons to control temperature and time

#### OUTSTANDING FEATURES

- Reversing drum action as standard
- Stainless steel drum as standard
- Frequency inverter as standard

#### EFFICIENCY

- MIXED FLOW - mixed axial-radial airflow
- Big fluff filter

#### VERSATILITY

- Make to order - customisation
- OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses

#### ERGONOMICS

- Drawer as fluff filter, made of stainless steel
- Biggest door diameters
- Opening sense of door adjustable on site

#### MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance

#### OTHERS

- Grey skinplate outer casing, stainless steel look
- SOFT TOUCH - new drum with stamped holes
- COOL DOWN - anti-wrinkle at the end of the cycle
- Heating options: electric, gas and steam
- CE approved

### OPTIONS


- M programmer display
- Double doorglass
- Reverse door opening
- Rear panel external air + filter
- Stainless steel front and side panel
- Steam battery in stainless steel
- Low pressure steam battery
- Fluff filter with grid 0,6mm (standard is 0,3mm)
- Fluff filter with grid 1,2mm (standard is 0,3mm)
- Reduced power (12kw instead of 18kw) for SR-18
- Maritime wooden packing
- Ship voltage for electric models: 440V III 50/60 Hz No neutral
- Other voltages available



# TECHNICAL DATA

## SINGLE POCKET DRYERS | CONCEPT | SR-18/22 M

	UNIT.	SR-18 M	SR-22 M		
<b>CAPACITY</b>					
Capacity 1/18	Kg	18,3	24,3		
Capacity 1/20	Kg	16,5	21,9		
Hourly Output (electr // gas)	Kg/h	28,3 // 31,9	34 // 40		
Evaporation capacity (electr // gas)	l/h	14,10 // 16,30	17 // 20		
<b>DRUM</b>					
Ø Drum	mm	750	835		
Ø Door (load hole)	mm	574	574		
Door center height	mm	976	1.030		
Load hole bottom height	mm	689	743		
Drum length	mm	746	800		
Drum volume	l	330	438		
<b>POWER</b>					
Drum motor power	Kw	0,37	0,37		
Fan motor power	Kw	0,25	0,55		
Electric heating power	Kw	18	24		
Total electric power (elec.model)	Kw	18,67	24,97		
Gas heating power	Kw	20,51	31		
Total electric power (gas model)	Kw	0,67	0,97		
Steam heating power	Kw	30	49,2		
Total electric power (steam model)	Kw	0,67	0,97		
<b>CONNECTIONS</b>		<b>ELECTRICAL</b>	<b>STEAM / GAS</b>	<b>ELECTRICAL</b>	<b>STEAM / GAS</b>
Tension 230V - I + N + T	Nº x mm <sup>2</sup> / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm <sup>2</sup> / A	4 x 16 / 63A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm <sup>2</sup> / A	5 x 10 / 32A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Net Width / Gross Width	mm	785 / 865		890/970	
Net Depth / Gross Depth	mm	1.125 / 1.210		1.255 / 1.345	
Net Height / Gross Height	mm	1.694 / 1.840		1.812 / 1.940	
Net weight / Gross weight	Kg	187 / 200		210 / 230	
<b>OTHERS</b>					
Max airflow Concept	m <sup>3</sup> /h	850		1.200	
Ø Fume exhaust	mm	200		200	
Sound level Concept	dB	64		65	

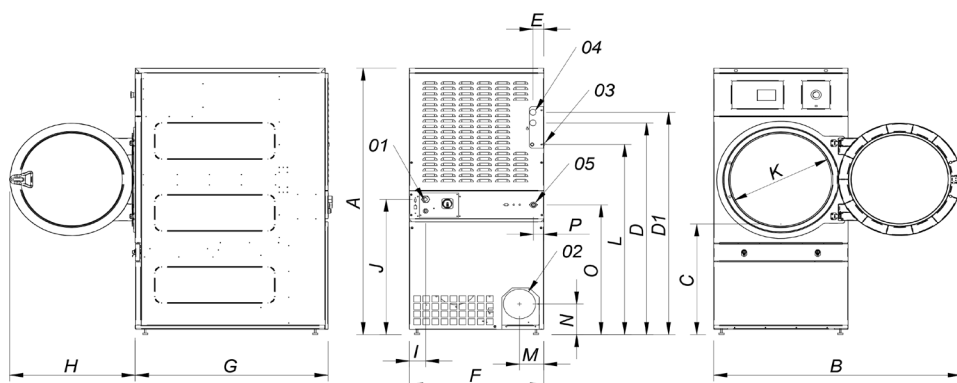

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 04 STEAM INLET 1" (SR-22)
- 05 CONDENSATE OUTLET 3/4"
- 05 CONDENSATE OUTLET 1" (SR-22)
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
SR-18	1694	1447	689	1354	1422	68	68	785	855	735	95	870	575	1226	133	180	830	65
SR-22	1694	1447	689	1354	1422	68	68	785	989	735	95	870	575	1226	133	180	830	65