

DRYING

SINGLE POCKET DRYERS CONCEPT SR-11/14 M



CHARACTERISTICS

M PROGRAMMER

- New M programmer: push buttons to control temperature and time

OUTSTANDING FEATURES

- Reversing drum action as standard
- Stainless steel drum as standard
- Frequency inverter as standard

EFFICIENCY

- MIXED FLOW - New 'optimized' system of mixed airflow
- Big fluff filter

VERSATILITY

- Make to order - customisation
- OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses

ERGONOMICS

- Drawer as fluff filter, made of stainless steel
- Biggest door diameters
- Opening sense of door adjustable on site

MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance

OTHERS


- Grey skinplate outer casing, stainless steel look
- SOFT TOUCH - new drum with stamped holes
- COOL DOWN - anti-wrinkle at the end of the cycle
- Heating options: electric, gas and steam
- CE approved

TECHNICAL DATA

SINGLE POCKET DRYERS | CONCEPT | SR-11/14 M


	UNIT.	SR-11 M	SR-14 M		
CAPACITY					
Capacity 1/18	Kg	12	15		
Capacity 1/20	Kg	11	13,5		
Hourly Output Concept*	Kg/h	23-21	34-30		
Evaporation capacity Concept*	l/h	14,5	15,40		
DRUM					
Ø Drum	mm	750	750		
Ø Door	mm	574	574		
Door center height	mm	976	976		
Load hole bottom height	mm	689	689		
Drum length	mm	475	610		
Drum volume	l	210	270		
POWER					
Drum motor power	Kw	0,37	0,37		
Fan motor power Concept	Kw	0,25	0,25		
Electric heating power ALL RANGES	Kw	12	18		
Total electric power (elec.model) Conc	Kw	12,67	18,67		
Gas heating power ALL RANGES	Kw	20,51	20,51		
Total electric power (gas model) Conc	Kw	0,67	0,67		
Steam heating power ALL RANGES	Kw	30	30		
Steam heating power (gas model) Conc	Kw	0,67	0,67		
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V - I + N + T	N° x mm2 / A	3 x 25 / 63A	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	N° x mm2 / A	4 x 10 / 40A	3 x 1,5 / 20A	4x16 / 63A	3 x 1,5 / 20A
Tension 400V - III + N + T	N° x mm2 / A	5 x 4 / 25A	3 x 1,5 / 20A	5x10 / 32A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
Ø Steam inlet	BSP	3/4"		3/4"	
Ø Condensed (Steam models)	BSP	3/4"		3/4"	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	785 / 865		785 / 865	
Net Depth / Gross Depth	mm	855 / 940		989 / 1074	
Net Height / Gross Height	mm	1.694 / 1.840		1694 / 1840	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	172 / 180		180 / 190	
OTHERS					
Max airflow Concept	m3/h	850		850	
Ø Fume exhaust	mm	200		200	
Sound level Concept	dB	64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

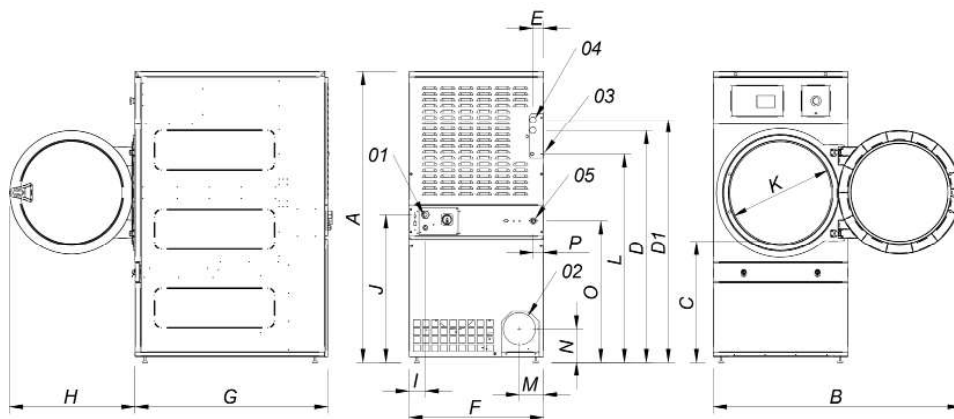

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 05 CONDENSATE OUTLET 3/4"
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
SR-11	1694	1447	689	1354	1422	68	68	785	855	735	95	870	575	1226	133	180	830	65
SR-14	1694	1447	689	1354	1422	68	68	785	989	735	95	870	575	1226	133	180	830	65



DRYING

SINGLE POCKET DRYERS CONCEPT SR-16/23 M



CHARACTERISTICS

M PROGRAMMER

- New M programmer: push buttons to control temperature and time

OUTSTANDING FEATURES

- Reversing drum action as standard
- Stainless steel drum as standard
- Frequency inverter as standard

EFFICIENCY

- MIXED FLOW - New 'optimized' system of mixed airflow
- Big fluff filter

VERSATILITY

- Make to order - customisation
- OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses

ERGONOMICS

- Drawer as fluff filter, made of stainless steel
- Biggest door diameters
- Opening sense of door adjustable on site

MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance

OTHERS


- Grey skinplate outer casing, stainless steel look
- SOFT TOUCH - new drum with stamped holes
- COOL DOWN - anti-wrinkle at the end of the cycle
- Heating options: electric, gas and steam
- CE approved

OPTIONS

- M programmer display
- Double doorglass
- Reverse door opening
- Rear panel external air + filter
- Stainless steel outer casing
- Stainless steel front panel
- Stainless steel steam battery
- Low pressure steam battery
- Fluff filter with grid 0,6mm (standard is 0,3mm)
- Fluff filter with grid 1,2mm (standard is 0,3mm)
- Wooden packing
- Ship voltage for electric models: 440V III 50/60 Hz No neutral


TECHNICAL DATA
SINGLE POCKET DRYERS | CONCEPT | SR-16/23 M

	UNIT.	SR-16 M	SR-23 M		
CAPACITY					
Capacity 1/18	Kg	18	26		
Capacity 1/20	Kg	17	23		
Hourly Output Concept*	Kg/h	35-33	41-35		
Evaporation capacity Concept*	l/h	16,3	20,4		
DRUM					
Ø Drum	mm	750	855		
Ø Door (load hole)	mm	574	574		
Door center height	mm	976	1.030		
Load hole bottom height	mm	689	743		
Drum length	mm	746	800		
Drum volume	l	330	460		
POWER					
Drum motor power	Kw	0,37	0,37		
Fan motor power Concept	Kw	0,25	0,55		
Electric heating power ALL RANGES	Kw	18	24		
Total electric power (elec.model) Conc	Kw	18,67	24,97		
Gas heating power ALL RANGES	Kw	20,51	31		
Total electric power (gas model) Conc	Kw	0,67	0,97		
Steam heating power ALL RANGES	Kw	30	49,2		
Steam heating power (gas model) Conc	Kw	0,67	0,97		
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 16 / 63A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 10 / 32A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
Ø Steam inlet	BSP	3/4"		1"	
Ø Condensed (Steam models)	BSP	3/4"		1"	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	785 / 865		890/970	
Net Depth / Gross Depth	mm	1.125 / 1.210		1.255/1.345	
Net Height / Gross Height	mm	1.694 / 1.840		1.812/1.940	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	187 / 200		210/230	
OTHERS					
Max airflow Concept	m3/h	850		1.200	
Ø Fume exhaust	mm	200		200	
Sound level Concept	dB	64		65	

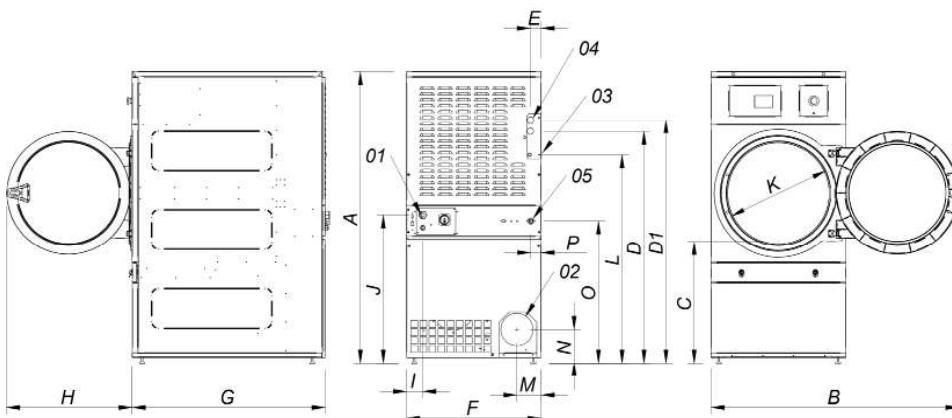

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 04 STEAM INLET 1" (SR-23)
- 05 CONDENSATE OUTLET 3/4"
- 05 CONDENSATE OUTLET 1" (SR-23)
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
SR-16	1694	1447	689	1354	1422	68	68	785	1125	735	95	870	575	1226	133	180	830	65
SR-23	1812	1552	743	1430	1532	112	55	890	1255	735	95	920	575	1344	238	180	885	65



DRYING

SINGLE POCKET DRYERS CONCEPT SR-28/35 M



CHARACTERISTICS

M PROGRAMMER

- New M programmer: push buttons to control temperature and time

OUTSTANDING FEATURES

- Reversing drum action as standard
- Stainless steel drum as standard
- Frequency inverter as standard

EFFICIENCY

- MIXED FLOW - New 'optimized' system of mixed airflow
- Big fluff filter

VERSATILITY

- Make to order - customisation
- OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses

ERGONOMICS

- Drawer as fluff filter, made of stainless steel
- Biggest door diameters
- Opening sense of door adjustable on site

MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance

OTHERS

- Grey skinplate outer casing, stainless steel look
- SOFT TOUCH - new drum with stamped holes
- COOL DOWN - anti-wrinkle at the end of the cycle
- Heating options: electric, gas and steam
- CE approved

OPTIONS


- M programmer display
- Double doorglass
- Reverse door opening
- Rear panel external air + filter
- Stainless steel outer casing
- Stainless steel front panel
- Stainless steel steam battery
- Low pressure steam battery
- Fluff filter with grid 0,6mm (standard is 0,3mm)
- Fluff filter with grid 1,2mm (standard is 0,3mm)
- Wooden packing
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

TECHNICAL DATA

SINGLE POCKET DRYERS | CONCEPT | SR-28/35 M


	UNIT.	SR-28 M	SR-35 M		
CAPACITY					
Capacity 1/18	Kg	31	37		
Capacity 1/20	Kg	28	33		
Hourly Output Concept*	Kg/h	56-53	70-65		
Evaporation capacity Concept*	l/h	30,9	32,1		
DRUM					
Ø Drum	mm	947	947		
Ø Door (load hole)	mm	802	802		
Door center height	mm	1.040	1.040		
Load hole bottom height	mm	640	640		
Drum length	mm	780	936		
Drum volume	l	550	660		
POWER					
Drum motor power	Kw	0,55	0,55		
Fan motor power Concept	Kw	0,55	0,55		
Electric heating power ALL RANGES	Kw	30	36		
Total electric power (elec.model) Conc	Kw	31,15	37,15		
Gas heating power ALL RANGES	Kw	41	41		
Total electric power (gas model) Conc	Kw	1,15	1,15		
Steam heating power ALL RANGES	Kw	50,1	50,1		
Steam heating power (gas model) Conc	Kw	1,15	1,15		
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 35 / 100A	3 x 1,5 / 20A	4 x 50 / 125A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 16 / 63A	3 x 1,5 / 20A	5 x 16 / 63A	3 x 1,5 / 20A
Ø Gas inlet	BSP		1/2"		1/2"
Ø Steam inlet	BSP		1"		1"
Ø Condensed (Steam models)	BSP		1"		1"
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	985/1.065		985/1.065	
Net Depth / Gross Depth	mm	1.054/1.154		1.210/1.310	
Net Height / Gross Height	mm	1.975/2.080		1.975/2.080	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	230/260		260/285	
OTHERS					
Max airflow Concept	m3/h	1.200		1.200	
Ø Fume exhaust	mm	200		200	
Sound level Concept	dB	65		65	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

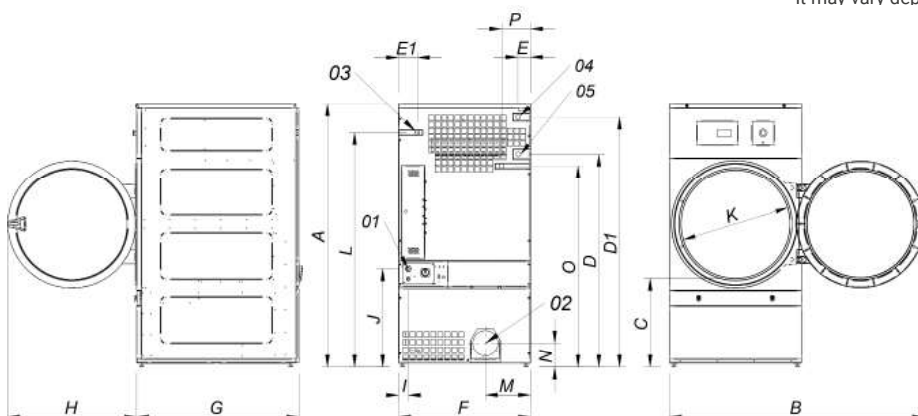

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 1"
- 05 CONDENSATE OULET 1"
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
SR-28	1975	1910	660	1590	1875	102	130	985	1054	970	70	730	802	1760	337	178	1510	215
SR-35	1975	1910	660	1590	1875	102	130	985	1210	970	70	730	802	1760	337	178	1510	215



DRYING

SINGLE POCKET DRYERS CONCEPT SR-45/60/80 M



CHARACTERISTICS

M PROGRAMMER

- New M programmer: push buttons to control temperature and time

OUTSTANDING FEATURES

- Reversing drum action as standard
- Stainless steel drum as standard
- Frequency inverter as standard

EFFICIENCY

- MIXED FLOW - New 'optimized' system of mixed airflow
- Big fluff filter

VERSATILITY

- Make to order - customisation

ERGONOMICS

- Drawer as fluff filter, made of stainless steel
- Biggest door diameters
- Opening sense of door adjustable on site

MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance

OTHERS

- Grey skinplate outer casing, stainless steel look
- SOFT TOUCH - new drum with stamped holes
- COOL DOWN - anti-wrinkle at the end of the cycle
- Heating options: electric, gas and steam
- CE approved

OPTIONS


- M programmer display
- Double doorglass
- Reverse door opening
- Rear panel external air + filter
- Stainless steel outer casing
- Stainless steel front panel
- Stainless steel steam battery
- Low pressure steam battery
- Fluff filter with grid 0,6mm (standard is 0,3mm)
- Fluff filter with grid 1,2mm (standard is 0,3mm)
- Wooden packing
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

TECHNICAL DATA

SINGLE POCKET DRYERS | CONCEPT | SR-45/60/80 M

	UNIT.	SR-45 M	SR-60 M	SR-80 M			
CAPACITY							
Capacity 1/18	Kg	50	67	83			
Capacity 1/20	Kg	45	60	75			
Hourly Output Concept*	Kg/h	96-90	129-120	171-160			
Evaporation capacity Concept*	l/h	42,5	65,8	96,50			
DRUM							
Ø Drum	mm	1.225	1.225	1.225			
Ø Door	mm	802	802	802			
Door center height	mm	1.275	1.275	1.275			
Load hole bottom height	mm	874	874	874			
Drum length	mm	760	1.020	1.252			
Drum volume	l	896	1.202	1.500			
POWER							
Drum motor power	Kw	0,75	1,1	1,5			
Fan motor power Concept	Kw	1,1	1,1	1,1			
Electric heating power ALL RANGES	Kw	54	72	72			
Total electric power (elec.model) Concept	Kw	55,9	74,25	74,65			
Gas heating power ALL RANGES	Kw	60	90	120			
Total electric power (gas model) Concept	Kw	1,9	2,25	2,65			
Steam heating power ALL RANGES	Kw	91,3	128	128			
Steam heating power (gas model) Concept	Kw	1,9	2,25	2,65			
CONNECTIONS							
		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V - I + N + T	Nº x mm2 / A	-	-	-	-	-	-
Tension 230V - III + T	Nº x mm2 / A	-	4 x 2,5 / 20A	-	4 x 2,5 / 32A	-	4 x 2,5 / 32A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 35 / 100A	5 x 1,5 / 20A	5 x 50 / 125A	5 x 1,5 / 32A	5 x 50 / 125A	5 x 1,5 / 32A
Ø Gas inlet	BSP	3/4"		3/4"		3/4"	
Ø Steam inlet	BSP	1"		1"		1"	
Ø Condensed (Steam models)	BSP	1"		1"		1"	
DIMENSIONS / PACKING DIMENSIONS							
Net Width / Gross Width	mm	1.270/1.330		1.270/1.330		1.270/1.330	
Net Depth / Gross Depth	mm	1.106/1.185		1.366/1.445		1.598/1.705	
Net Height / Gross Height	mm	2.380/2.150		2.380/2.150		2.380/2.150	
Height without heating battery	mm	1.950		1.950		1.950	
Net weight / Gross weight	Kg	395/430		529/575		657/715	
OTHERS							
Max airflow Concept	m3/h	3.000		3.000		3.000	
Ø Fume exhaust	mm	300		300		300	
Sound level Concept	dB	67		67		67	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

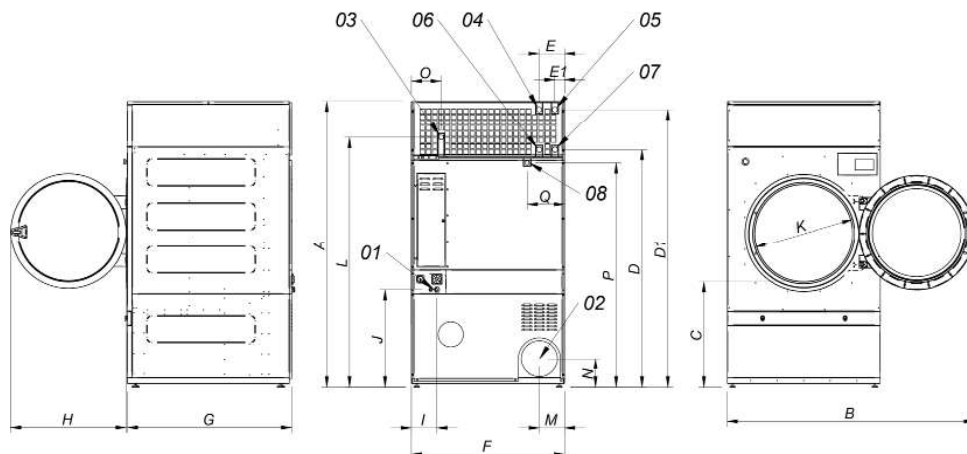

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø300
- 03 GAS INLET 3/4"
- 04 STEAM INLET (SR-45) 1"
- 05 STEAM INLET (SR-60/80) 1"
- 06 CONDENSATION OUTLET (SR-45) 1"
- 07 CONDENSATION OUTLET (SR-60/80) 1"
- 08 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P	Q
SR-45	2380	2045	874	1981	2311	211	80	1270	1106	956	230	870	802	2088	214	240	244	1841	308
SR-60	2380	2045	874	1981	2311	211	80	1270	1366	956	230	870	802	2088	214	240	244	1841	308
SR-80	2380	2045	874	1981	2311	211	80	1270	1598	956	230	870	802	2088	214	240	244	1841	308