


# IRONER

## TFI 6032

---

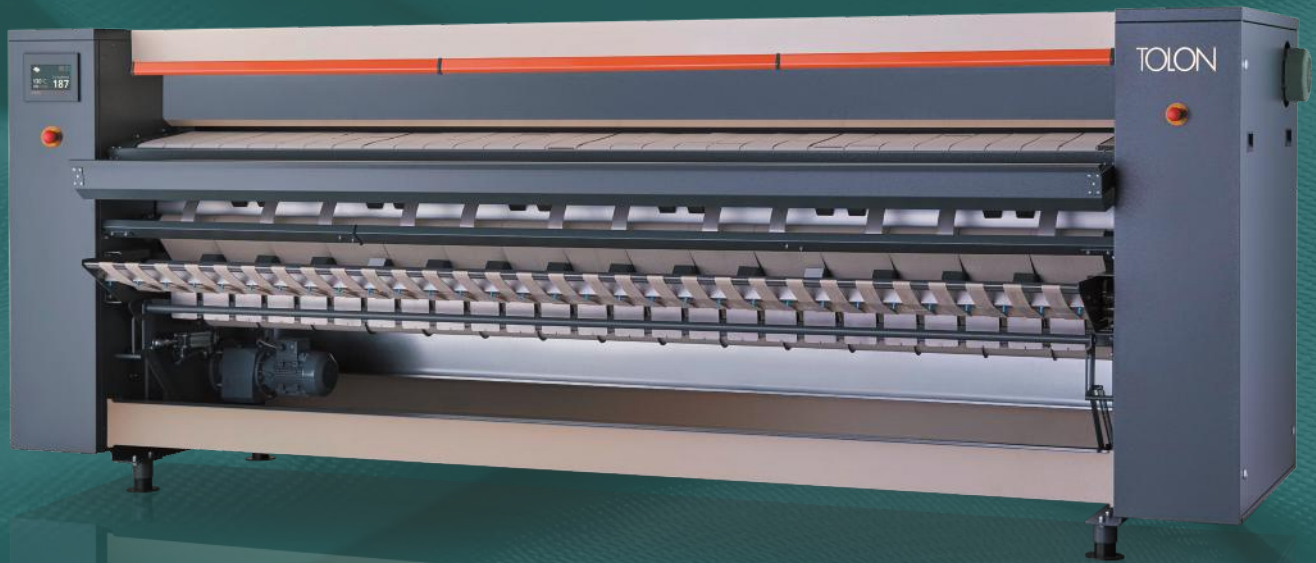

### STANDARD FEATURES & BENEFITS

- Ergonomic cylinder heated ironer
- Gas or electric heating
- Extended heat transfer path
- Large surface contact with linen
- Roll standard with chrome surface coating for better thermal conduction and highly resistant to corrosion, even after periods of inactivity
- Finger protection panel and emergency button for more safety
- Easy to use electronic control with pre-set ironing programmes
- Indication of ironing temperature and speed
- Frequency controlled motor
- Reverse mode possible
- Space-saving wall model with front return of the linen
- Overheating check system with 2 temperature sensors
- Premix burner for more power and efficient ironing

### OPTIONS

- Longitudinal fold
- 3 temperature sensors and partial LED lights
- 3 folding sensors at feeding point instead of 1
- Transport wheels

TOLON

# IRONER

## TFI 6032

MODEL	UNIT	TFI 6032	
Roll diameter	mm	600	
Working width	mm	3200	
Roll speed	m/min	3,5-12	
Performance	Pneumatic folding	kg/h	110-130
	Elektrik folding	kg/h	180-200
<b>HEATING</b>			
Electric			
Electric heating power *	kW	67,4	
Evaporation	l/h	80	
Electric consumption	kW/h	50	
Gas			
Gas power	kW	81,9	
Evaporation	Elektrik folding	l/h	60
	Pneumatic folding	l/h	100
Gas connection Ø	DN	20 (¾")	
Gas pressure	mbar	20	
Gas consumption	m³/h	8	
<b>VOLTAGE/ELECTRIC CONNECTION</b>			
Electric	3ph 50Hz	200/220/230/240/380/400/415 V	
	3ph 60Hz	200/208/220/240/380/415 V	
Gas	1ph 50Hz	200/208/220/230/240 V	
	1ph 60Hz	200/208/220/240 V	
<b>MOTOR</b>			
Roll motor	kW	0,75	
Fan motor	kW	1,1	
<b>EXHAUST</b>			
Exhaust connection Ø	mm	125	
Airflow			
Electric	m³/h	1125	
Gas	m³/h	1125	
<b>DIMENSIONS (WxDxH)</b>			
Standard	mm	4160x1360x1610	
Packed	mm	4260x1510x1775	
<b>WEIGHT</b>			
Net	kg	1940	
Gross	kg	2160	
<b>SOUND LEVEL</b>			
	db(A)	< 65,6	

\* Output calculated at 380V/IIIphase