


HARD MOUNT WASHERS

TWR 10 · 15 · 18

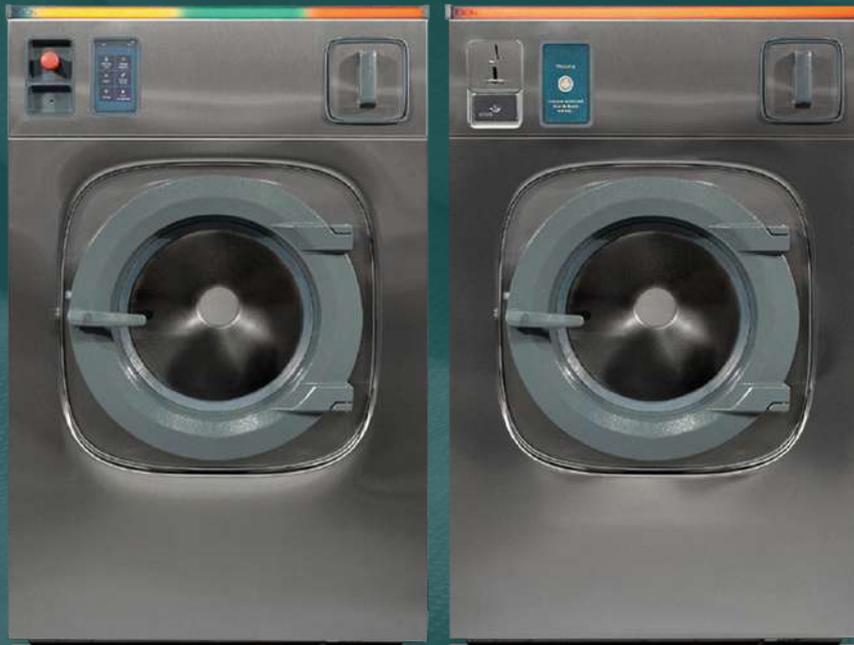

STANDARD FEATURES & BENEFITS

- Compact & modern space-saving design
- Large loading and unloading doors with up to 180° opening angle for easy access
- Choice of liquid and powder detergent in frontal soap dispenser; 5 compartment for TWR 10-15-18-24-28; 6 compartment for TWR 40
- Standard equipped for automatic soap dosing
- Drum and tub, as well as front panel made of robust and durable high quality stainless steel AISI 304
- Ceramic coated sleeve for longer life due to less friction on sealing surfaces
- Highly flexible and freely programmable control with advanced vertical touchscreen easy operation and perfect management of your laundry business
- USB type C connection in the front for quick data transfer and data editing on simple .csv format
- Dynamic progress bar indication for easy and quick visual management
- Large 3" drain valve for fast evacuation and shorter cycles

COIN OPTIONS

- Standard prepared for single coin drop
- Single coin drop or electronic coin meter and collection box option
- Optional, prepared for central payment

OPTIONS

- Dual heating (electric and steam) selectable through the control
- Stainless steel side, back, and top panels
- 3rd inlet valve for soft water (TWR 10-15-18-24-28-40)
- Second drain valve for water recovery (TWR 24-28-40)
- Chemical hold signal
- High flow inlet valves for faster filling (TWR 10-15; STD for TWR 18-24-28-40)
- Soap box spray rinse

TOLON

HARD MOUNT WASHERS


TWR 10 · 15 · 18

MODEL		UNIT	TWR10	TWR15	TWR18
CAPACITY					
Dry load		kg	10	15	18
Performance		kg/h	15	22,5	27
Cycle duration		min	30-45	30-45	30-45
DRUM					
Drum diameter		mm	630	630	630
Drum depth		mm	330	490	580
Drum volume		l	103	153	181
Wash speed		rpm	43	43	43
Extraction speed	L/M	rpm	530/750	530/750	530/750
G-force	L/M		100/200	100/200	100/200
DOOR					
Door opening Φ		mm	455	455	455
HEATING					
Electric		kW	9	15	18
Steam		bar	4-6	4-6	4-6
ELECTRIC					
Electric consumption*	electric	kW/h	2,34	3,1	3,66
Motor		kW	1,1	1,1	1,5
STEAM					
Steam valve connection Φ		DN-BSP	15-½"	15-½"	15-½"
Steam pressure	min-max	kPa	400-600	400-600	400-600
Steam consumption		kg/cycle	5	7,5	9
AIR					
Air Connection Φ		mm	Opt / 8	Opt / 8	Opt / 8
WATER					
Inlet valve connection Φ		DN-BSP	2 x 20-¾"	2 x 20-¾"	2 x 20-¾"
Water pressure	min-max	kPa	200-400	200-400	200-400
Water flow (low flow valve)		l/min	60	60	60
Water consumption*	cold	l/cycle	39	58	68
	hot	l/cycle	42	62	73
Drain valve connection Φ (outer)		mm	76	76	76
Drain flow		l/min	230	230	230
PROGRAMMABLE CONTROL					
New Vector Control			Std	Std	Std
DIMENSIONS (WxDxH)					
Net - Standard		mm	785 x 890 x 1285	785 x 1050 x 1285	785 x 1140 x 1285
Packed - Standard		mm	820 x 970 x 1425	820 x 1130 x 1425	820 x 1220 x 1425
WEIGHT					
Net - Standard		kg	290	300	310
SOUND PRESSURE					
Sound level		db(A)	55-65	55-65	55-65

* Consumption figures based on "Eco 60°C" program (main wash, 2 rinses)

HARD MOUNT WASHERS

TWR 24 · 28 · 40

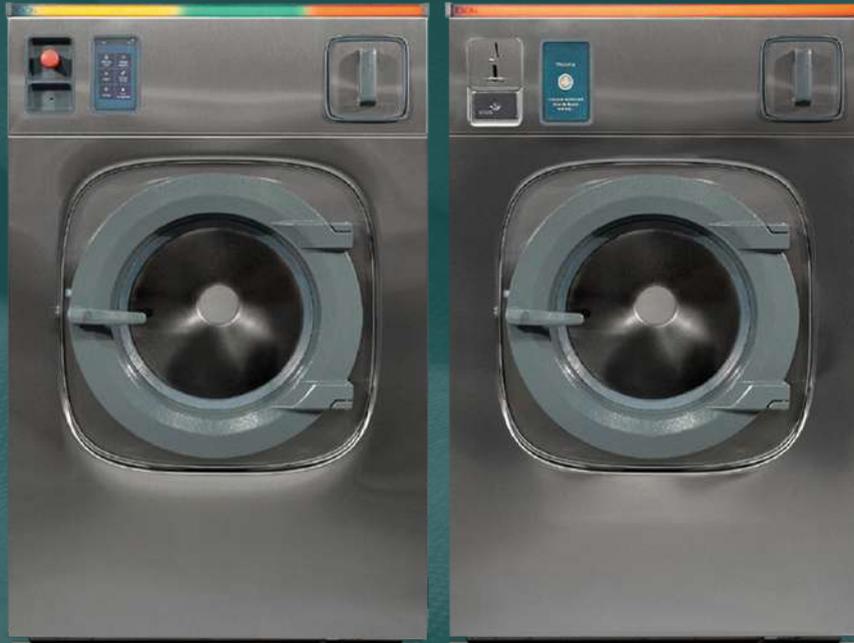

STANDARD FEATURES & BENEFITS

- Compact & modern space-saving design
- Large loading and unloading doors with up to 180° opening angle for easy access
- Choice of liquid and powder detergent in frontal soap dispenser; 5 compartment for TWR 10-15-18-24-28; 6 compartment for TWR 40
- Standard equipped for automatic soap dosing
- Drum and tub, as well as front panel made of robust and durable high quality stainless steel AISI 304
- Ceramic coated sleeve for longer life due to less friction on sealing surfaces
- Highly flexible and freely programmable control with advanced vertical touchscreen easy operation and perfect management of your laundry business
- USB type C connection in the front for quick data transfer and data editing on simple .csv format
- Dynamic progress bar indication for easy and quick visual management
- Large 3" drain valve for fast evacuation and shorter cycles

COIN OPTIONS

- Standard prepared for single coin drop
- Single coin drop or electronic coin meter and collection box option
- Optional, prepared for central payment

OPTIONS

- Dual heating (electric and steam) selectable through the control
- Stainless steel side, back, and top panels
- 3rd inlet valve for soft water (TWR 10-15-18-24-28-40)
- Second drain valve for water recovery (TWR 24-28-40)
- Chemical hold signal
- High flow inlet valves for faster filling (TWR 10-15; STD for TWR 18-24-28-40)
- Soap box spray rinse

TOLON

HARD MOUNT WASHERS

TWR 24 · 28 · 40

MODEL	UNIT		TWR24	TWR28	TWR40
CAPACITY					
Dry load		kg	24	28	40
Performance		kg/h	36	42	60
Cycle duration		min	30-45	30-45	30-45
DRUM					
Drum diameter		mm	700	700	900
Drum depth		mm	630	720	575
Drum volume		l	242	277	365
Wash speed		rpm	37	37	35
Extraction speed	L/M	rpm	500/710	500/710	540
G-force	L/M		100/200	100/200	150
DOOR					
Door opening Φ		mm	455	455	560
HEATING					
Electric		kW	21	24	30
Steam		bar	4-6	4-6	4-6
ELECTRIC					
Electric consumption*	electric	kW/h	4,9	5,6	8,93
Motor		kW	2,2	2,2	3
STEAM					
Steam valve connection Φ		DN-BSP	15-½"	15-½"	20-¾"
Steam pressure	min-max	kPa	400-600	400-600	400-600
Steam consumption		kg/cycle	12	14	20
AIR					
Air Connection Φ		mm	Opt / 8	Opt / 8	Opt / 8
WATER					
Inlet valve connection Φ		DN-BSP	2 x 20-¾"	2 x 20-¾"	2 x 20-¾"
Water pressure	min-max	kPa	200-400	200-400	200-400
Water flow (low flow valve)		l/min	60	60	60
Water consumption*	cold	l/cycle	78	89	110
	hot	l/cycle	86	99	147
Drain valve connection Φ (outer)		mm	76	76	76
Drain flow		l/min	230	230	230
PROGRAMMABLE CONTROL					
New Vector Control			Std	Std	Std
DIMENSIONS (WxDxH)					
Net - Standard		mm	869 x 1230 x 1390	869 x 1320 x 1390	1070 x 1290 x 1715
Packed - Standard		mm	910 x 1310 x 1535	910 x 1400 x 1535	1110 x 1370 x 1865
WEIGHT					
Net - Standard		kg	440	450	600
SOUND PRESSURE					
Sound level		db(A)	55-65	55-65	55-65

* Consumption figures based on "Eco 60°C" program (main wash, 2 rinses)