

HEAVY DUTY SOFT-MOUNT WASHER EXTRACTORS



Capacity: 40/60/80/100/120kg

Forward Tilting: 100/120kg

Features

- Stainless steel drum and tub.
- Clad steel panels resist rust and fingerprints, optional stainless steel.
- The uniquely designed 3D stereoscopic honey-comb-shaped inner drum with perforated lifters .
- Permanently lubricated bearings.
- Heavy duty suspension system, working with an intelligent electronic balancing system.
- 5 removable chemical compartments and 5 hoses for dosing pump.
- Mechanical and electronic double door lock and emergency stop.
- Heavy duty pneumatic water valves, drain valves and steam valves.
- Advanced inverter drive system.

Control


- Full-color touchscreen control offers 50 programs.
- Freely programmable and available in multiple languages.
- USB connection and networking capability.
- Service audit data and remaining time indicator.

Options

- Electric heating, Steam heating or dual heating.
- Contact us for other requests.

Specifications		SXT400F	SXT600F	SXT800F	SXT1000F	SXTQ1000F	SXT1200F	SXTQ1200F
Control		Touch	Touch	Touch	Touch	Touch	Touch	Touch
Capacity 1:9-10	kg	40	60	80	100	100	120	120
Cylinder Diameter	mm	903	1078	1078	1310	1310	1310	1310
Cylinder Depth	mm	626	620	820	746	746	816	816
Volume	liter	401	565	750	1000	1000	1100	1100
Door Center to Floor	mm	982	1184	1184	1246	1434	1246	1441
Cold Water Inlet	inch	1.5	1.5	1.5	2	2	2	2
Hot Water Inlet	inch	1.5	1.5	1.5	2	2	2	2
Steam inlet	inch	1	1	1	1	1	1	1
Compressed air inlet*	mm	8	8	8	8	8	8	8
Drain Diameter	mm	76	125	125	2*125	2*125	2*125	2*125
Motor Power	kW	4	7.5	7.5	11	11	11	11
Three-phase heating power	kW	30	30	30	60	60	60	60
Extract Speed	RPM	833	762	762	691	691	691	691
G-Force		350	350	350	350	350	350	350
Power Supply	380V/50Hz/60Hz/3ph Contact us for other supply							
Overall Width	mm	1263	1619	1619	1774	1850	1774	1850
Overall Depth	mm	1433	1492	1692	1761	1825	1828	1895
Overall Height	mm	1735	1965	1965	2092	2285	2092	2290
Net Weight	kg	1190	1910	2200	3000	3400	3170	3580
Packing Width	mm	1330	1719	1719	1874	body:1950/ tilting base:1950	1874	body:1950/ tilting base:1950
Packing Depth	mm	1533	1592	1792	1861	body:1925/ tilting base:700	1928	1995/ tilting base:800
Packing Height	mm	1885	2115	2115	2242	body:1685/ tilting base:700	2242	1690/ tilting base:750

* Compressed air inlet only applies to steam heating models.

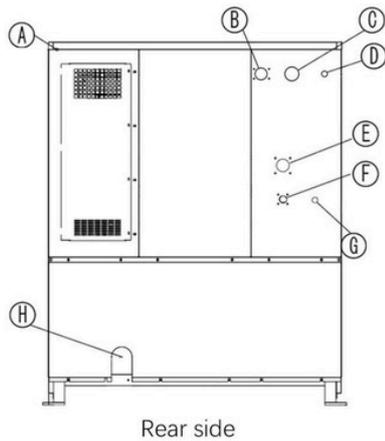

Rear side

- A. Electricity connection
- B. Cold water inlet
- C. Hot water inlet
- D. Compressed air inlet
- E. Soap water inlet
- F. Steam inlet
- G. Equibalance
- H. Water drainage

