

HIGH PERFORMANCE HARD-MOUNT WASHER EXTRACTORS



Capacity: 10/15/20/30/40kg

Features

- Stainless steel drum and tub.
- Clad steel panels resist rust and fingerprints.
- 10kg model with direct drive motor.
- 3D stereoscopic honeycomb-shaped inner drum with perforated lifters.
- Permanently lubricated bearings.
- Mechanical and electronic double door locks, along with an emergency stop.
- Standard configuration includes 4 chemical compartments and 5 hoses for dosing pumps.
- LED door light .

Control


- Full-color touchscreen control offers 50 programs for OPL and 6 for vend.
- Freely programmable and available in multiple languages.
- USB connection and networking capability.
- Remaining time indicator.
- Payment options available in coin, card, mobile pay, and central payment.

Options


- Electric heating or Steam heating.
- Contact us for other requests.

Specifications		SXT100G	SXT150G	SXT200G	SXT300G	SXT400G
Control		Touch/Electronic Press				
Activation		OPL/Vend	OPL/Vend	OPL/Vend	OPL/Vend	OPL/Vend
Capacity 1: 9-10	kg	10	15	20	30	40
Cylinder Diameter	mm	532	600	683	810	860
Cylinder Depth	mm	405	478	504	555	602
Volume	liter	90	135	185	286	350
Door Center to Floor	mm	576	633	674	767	781
Cold Water Inlet	inch	1/2	1/2	3/4	3/4	1
Hot Water Inlet	inch	1/2	1/2	3/4	3/4	1
Steam Heating		N/A	N/A	N/A	Inlet:1/2 inch, Pressure:3-8 bar	
Drain Diameter	mm	51	80	80	80	80
Motor Power	kW	1 (DD)	0.75	1.8	3.5	4
Single phase heating power	kW	2	6	6	N/A	N/A
Three-phase heating power	kW	6	9	18	18	24
Extraction Speed	RPM	820	772	724	665	645
G-Force		200	200	200	200	200
Power Supply		220V/50Hz/60Hz/1ph	220V/50Hz/60Hz/1ph	220V/50Hz/60Hz/1ph	220V/50Hz/60Hz/1ph	220V/50Hz/60Hz/1ph
		Electric heating 380V/50Hz/60Hz/3ph				
Contact us for other voltages						
Overall Width	mm	686	737	870	965	990
Overall Depth	mm	803	905	993	1138	1188
Overall Height	mm	1219	1272	1313	1460	1471
Net Weight	kg	160	210	280	560	960
Packing Width	mm	786	837	970	1065	1090
Packing Depth	mm	903	1005	1093	1238	1288
Packing Height	mm	1369	1422	1463	1610	1621


Oasis preserves the right to change the machines and the specification at any time without prior notice.

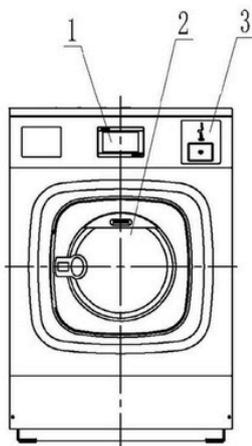


Front side



Left side

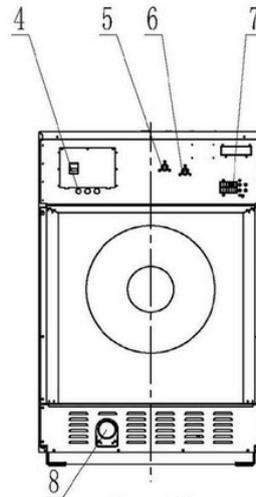

Rear side



Upper side

- 1.Controller
- 2. Door
- 3. Coin
- 4. Cable
- 5. Hot water
- 6. Cold water
- 7.External liquid supply
- 8.Drain
- 9. Soap

